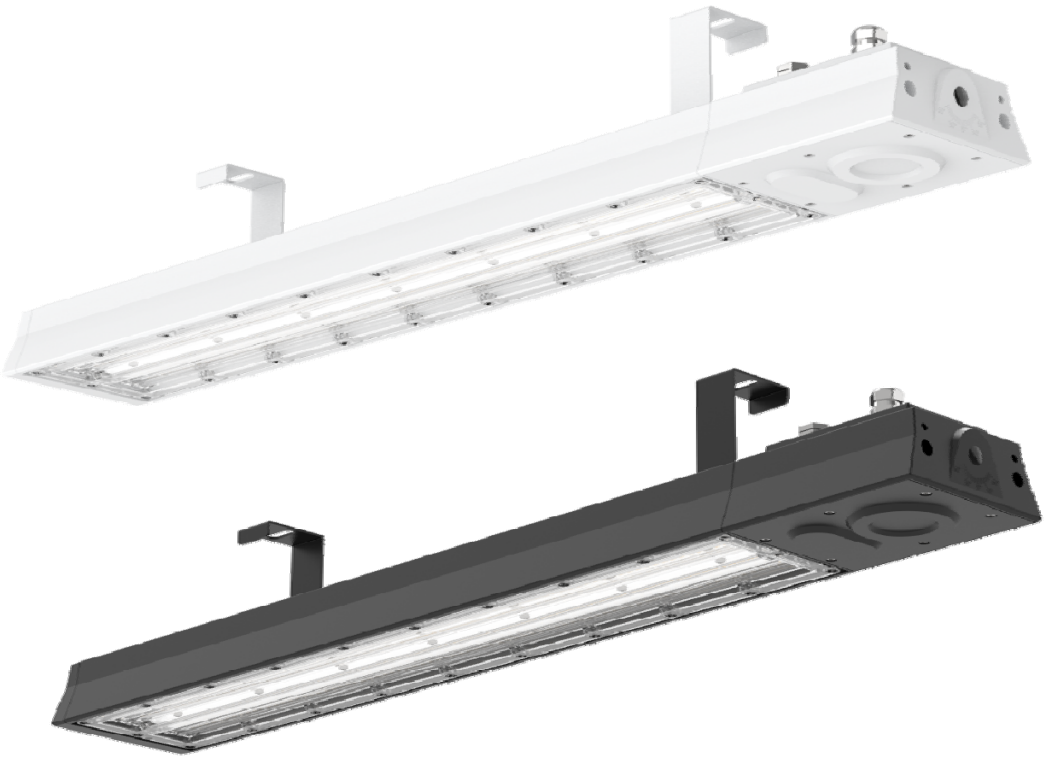


SWK-LI

www.sensetechlight.com

NO.6 ShengXing Street
WuShaCommunity,ChangAnTown,
DongguanCity,GuangdongProvince,P.R.China

VERSON:A2—20260414

Product Description

- 200Wpower adjustment via dial code, 3P (100W/150W/200W);
- 200W, dial-code adjustable power and color temperature, 3P+3CCT

- Light efficiency can reach: 130-170Lm/W±10%;

Angle: 90°/40°*100° two angles;

- Series design, with options for top installation or hanging wire installation;
- The AL6063-T5 aluminum alloy lamp housing features a streamlined design, ensuring good air convection and heat dissipation;
- Three-position dial for power adjustment: 100%, 75%, 50%;
- Three-level dialing for color temperature adjustment: 4000K/5000K/5700K;
- Protection level: IP65/IK07;
- Warranty: 5 years;

Application location:

Supermarkets, warehouses, factories, sports venues,

large buildings and other places.

CE RoHS


LED LINE High Bay Light

SWK-LI

Product parameters


Product model	SWK-LI-200W-3P(单色调功率)	SWK-LI-200W-3P-3CCT（三色调功率）
Input power(w)	200W±10%	SWK-LI-200W-3P-3CCT
Input voltage(V)	220V-240Vac	
Input frequency	50/60Hz	
Input current (A)	0.92A@230Vac	0.92A@230Vac
PF	≥0.95	
Power brand	Domestic	
Driver type	Non-isolated（Domestic)	
Surge protection	L-N 4KV ,L/N-PE 6KV	
Start time	≤0.5S（&230V)	
protection grade	Class Ⅰ	
Flicker coefficient	No strobe	
Flicker coefficient	≤8%(standard)	
THD	<15%	
Light source brand	Domestic；Lumileds(customized)	
LED Type	SMD2835	
Beam Angle	90°/40°*100°	
CCT	5700K	4000K/5000K/5700K
CRI /R9	Ra>80	
SDCM	≤7	
operation temperature	-30° —— +40°	
luminaire efficiency（Lm/W)	130Lm/W±10%，150Lm/W±10%，170Lm/W±10%	
Dimming	Three-position dial for power adjustment: 100%, 75%, 50%	
Housing material	AL6063-T5	
Shell color	Anode matte black SS9017 black/powder matte white SS9016 white	
Surface treatment	Anode matte black/powder matte white	
IK/IP	IP65/IK07	
AC input cable	PVC 3*0.75²（150mm ±50mm)	
warranty	5years	
Aluminum	/	
Product size (mm)	L773*W107*H89mm (Top installation) / L710*W107*H73mm（Hanging wire installation)	
Net weight (kg)	1.62	
Gross weight (kg)	1.95	
Packing size/quantity (mm)		

Product size(mm/inch)

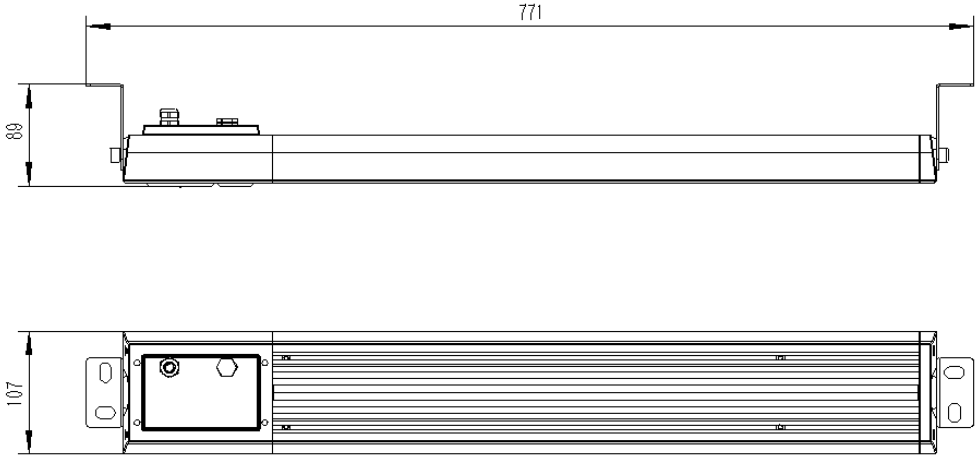

200W

Top installation

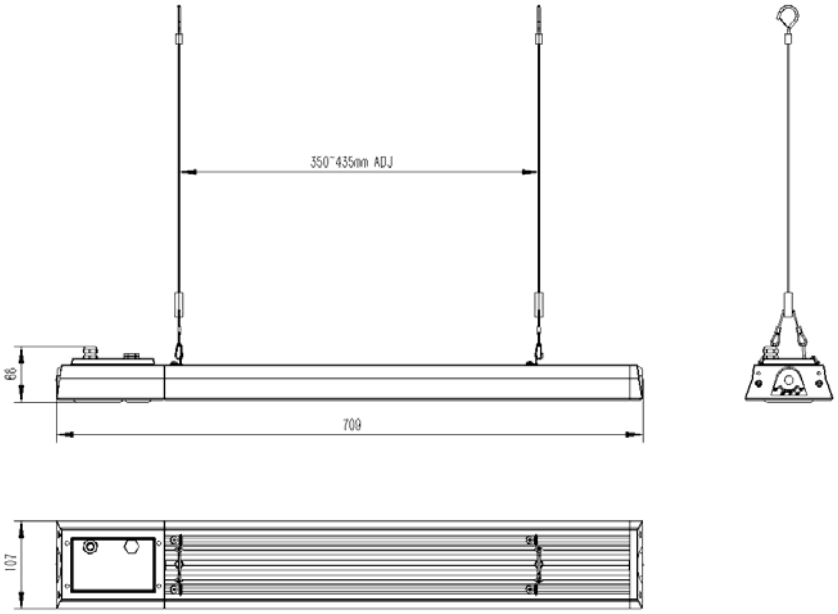


200W

Hanging wire installation

Schematic diagram of light distribution curve

90°

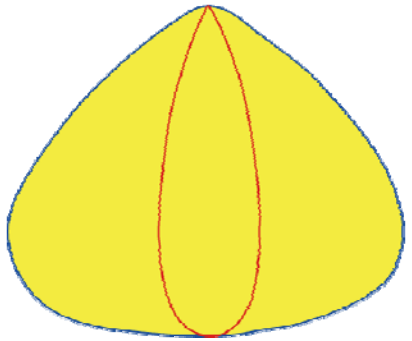

40°*100°