

SWL-BY

Features

- 30W | 50W | 60W | 90W | 100W | 120W | 150W | 180W | 200W | 210W | 240W
- Lamp body ADC12 Aliminum， Powder spraying surface treatment, corrosion resistance
- 500H salt spray test;
- Optical lens；
- LED source and driver seperatly;
- Open power supply chamber by top cover, knob type tools free;
- Smooth back cover, easy to clean
- Efficienty 135-170lm/w, LED source 2835/3030/5050 optianal；
- T2-M,T2-S light distribution
- IP66/IK08；
- L80:50000H/100000H

Applications:
Widely used in main roads, highways, sidewalks, parks, squares, docks, factories and other indoor or outdoor areas.

www.sensetechlight.com

NO.6 ShengXing Street WuShaCommunity,ChangAnTown,
DongguanCity,GuangdongProvince,P.R.China


Beiyu Street Light

SWL-BY


Model No.	SWL-BY30W SWL-BY50W SWL-BY60W	SWL-BY90W SWL-BY100W SWL-BY120W	SWL-BY150W SWL-BY180W	SWL-BY200W SWL-BY210W SWL-BY240W
Power	30W/50W/60W	90W/100W/120W	150W/180W	200W/210W/240W
Input voltage	100V-277Vac			
Frequency	50/60Hz			
Input current	0.33/0.55/0.67	1.0/1.10/1.22	1.66/1.75	2.22/2.33/2.67
PF	100~240Vac PF≥0.95 240~277Vac PF≥0.90			
Surge protection	L-N 5KV,L/N-PE 10KV			
THD	THD<20%			
LED	SMD2835 9V/SMD3030 6V/ SMD5050 24V			
Max LED quantity	5050:40 Pcs 3030:160 Pcs 2835:160 Pcs	5050:78 Pcs 3030:312 Pcs 2835:312 Pcs	5050:110Pcs 3030:440 Pcs 2835:440 Pcs	5050:150Pcs 3030:600 Pcs 2835:600 Pcs
Beam angle	Type Ⅱ-M/S			
CCT	3000K/4000K/5000K/5700K			
CRI	≥70			
IK	IK08			
IP	IP66			
Pole	φ48-60mm, Depth≈100mm			
Color	RAL9007 / GREY			
Efficiency	130/150Lm/W			
Net weight(kg)	2.9	4.2	5.3	6.5
Gross weight(kg)	3.4	5.1	6.5	8.1
Product size	195*440*165	245*550*172	280*650*173	320*780*174
Packing	500*235*190	610*285*200	720*330*200	850*370*200

Beiyu Street Light


SWL-BY

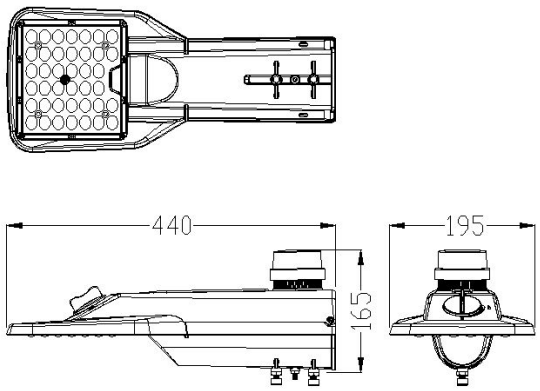


30W/50W/60W

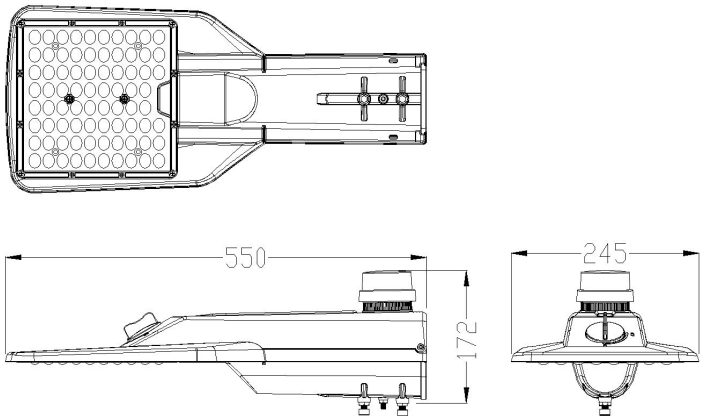

90W/100W/120W

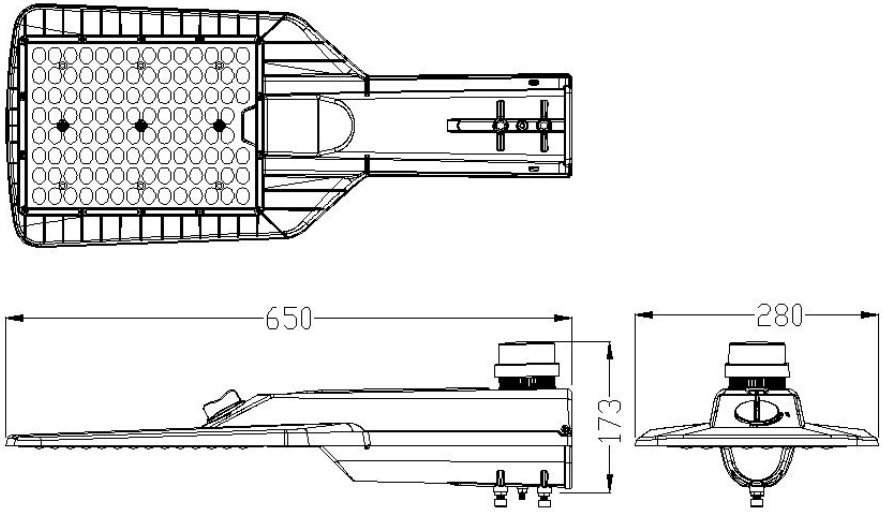

150W/180W

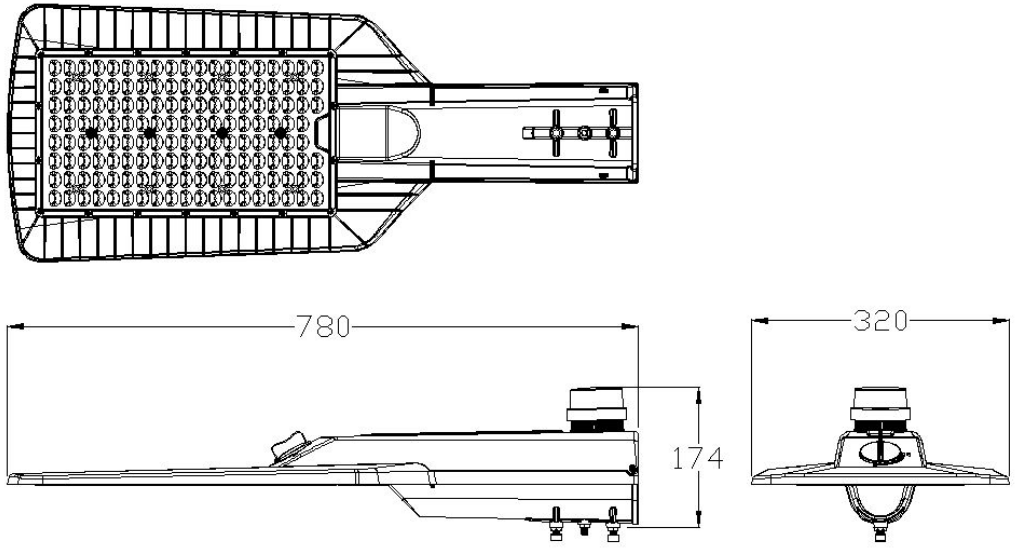

200W/210W/240W